			Title		
			System Interface Specification (PS300-907)		
	RESPONSIBLE	DATE	SIZE	DOCUMENT NO.	REV
AUTHORS			A4	P400-5059	00
USER					
RELEASE			MANUAL CHANGE PROHIBITED		SHEET 1 OF 4

System Interface Specification




PS300-907, 300.0kWh ESS

Enertech International, Inc.

269, Chungjuhosu-ro, Chungju-si, Chungcheongbuk-do, Korea

TEL: 82-43-850-1803 FAX: 82-43-855-9172

<http://www.enertechint.com>

Enertech International, Inc.	Issued	Checked	Approved
			

CONFIDENTIAL / SENSITIVE INFORMATION

Note: This document and any attachments may be proprietary, privileged and confidential, or otherwise protected from disclosure. If the reader of this document is not the intended recipient, or an employee or agent responsible for delivering this document to the intended recipient, you are hereby notified that you are not authorized to read, print, retain or copy this document or any part of it, and that any dissemination or distribution of this message is strictly prohibited. If you have received this document in error, please notify the person who delivered it immediately and destroy all copies of this document.

TITLE	SIZE	DOCUMENT NO.	REV
System Interface Specification (PS300-907)	A4	P400-5059	00
	MANUAL CHANGE PROHIBITED		SHEET 2 OF 4

1. Battery System Parameters

Specific parameters for the battery system blocks are detailed in the chart below

Parameter	Units	Specification	Note
Cell	Ah	20	SPB58253172V3
Series	n/a	216	Four racks
Parallel	n/a	4	Four racks
Cell Voltage			
Max	V	4.2	At 100% SOC
Nom	V	3.7	At 50% SOC
Min	V	2.7	At 0% SOC
Cell Capacity			
Rated	Ah	25	From cell specification
Battery Configuration			
Cell Modules	Modules	76	Each cell module contains 24 cells (12s2p)
Battery Capacity (BOL)			
Theoretical	Ah	100	Calculated based on cell capacity
Rated	Ah	-	Estimated when 1C rate is used to determine capacity; current taper applied at end of charge
Battery Capacity (EOL)			
Theoretical	Ah	70	Estimated at 70%
Battery Voltage			
Max	V	907.2	Determined at maximum cell voltage
Nom	V	799.2	Determined at nominal cell voltage
Min	V	583.2	Determined at minimum cell voltage
Battery Energy			
Theoretical	kWh	79.9	Calculated value based on theoretical system capacity
Rated	kWh	-	Calculated value based on rated system capacity
Usable (typical)	kWh	-	Estimated energy between 20% and 80% SOC, de-rated specific to system application
Usable (max)	kWh	-	Estimated energy between 8% and 90% SOC, de-rated specific to system application
Battery Discharge Power			
Continuous	kW	79.9	At nominal system voltage (70A*799.2V)
Max	kW	159.8	At nominal system voltage (140A*799.2V)
Peak	kW	-	At nominal system voltage (system/cell peak, duration less than 1.0s):
Battery Charge Power			



TITLE	SIZE	DOCUMENT NO.	REV
System Interface Specification (PS300-907)	A4	P400-5059	00
	MANUAL CHANGE PROHIBITED		SHEET 3 OF 4

Parameter	Units	Specification	Note
Continuous	kW	79.9	At nominal system voltage (70A*799.2.2V)
Max	kW	159.8	At nominal system voltage (140A*799.2V)
Peak	kW	-	At nominal system voltage (system/cell peak, duration less than 1.0s) :
Battery Discharge Current			
Continuous	A	30	Continuous between 20% and 100% SOC, specific to system application
Max	A	100	Continuous between 20% and 100% SOC (system maximum continuous)
Peak	A	-	Between 20% and 100% SOC (system/cell maximum surge, duration less than 10.0s)
Battery Charge Current			
Continuous	A	30	Continuous between 0% and 80% SOC, specific to system application
Max	A	100	Continuous between 0% and 80% SOC (system maximum continuous)
Peak	A	-	Between 0% and 80% SOC (system/cell maximum surge, duration less than 1.0s)
System Mass	kg	3170	Approximate calculated value (Four battery racks=3850kg and One BCP rack=90kg)
Battery Shelf Life	years	5	Continuous between 20% and 80% SOC
Cell Balancing	Type	Dissipative	MLEC Temperature Diagnostics
Thermal Management	Type	Limit Controlled	MLEC Current Limited above normal cell operating temperature
Operating Temperature/Humidity			
Max	% RH	85	Range (cell min/max)
Min	% RH	45	Range (cell min/max)
Max	Degrees °C	55	Zero Current Limited Above Max Operating Temp
Min(Discharge)	Degrees °C	(-)20	Zero Current Limited Below Min Operating Temp
Storage Temperature	Degrees °C	(-)20 to 25 <1year	Range (cell min/max)
Pre-Charge	Type	Internal	HV Load Capacitance protection
GFD	n/a	Enabled	MLEC Isolated Diagnostics
EPO	n/a	Enabled	Emergency Power OFF (interlock)

Table 1 Product Technical Specifications

TITLE	SIZE	DOCUMENT NO.	REV
System Interface Specification (PS300-907)	A4	P400-5059	00
	MANUAL CHANGE PROHIBITED		SHEET 4 OF 4

2. Mechanical Drawings

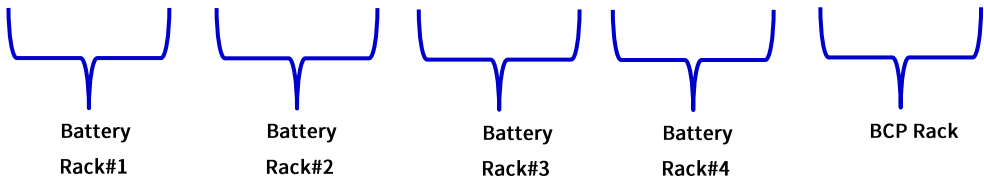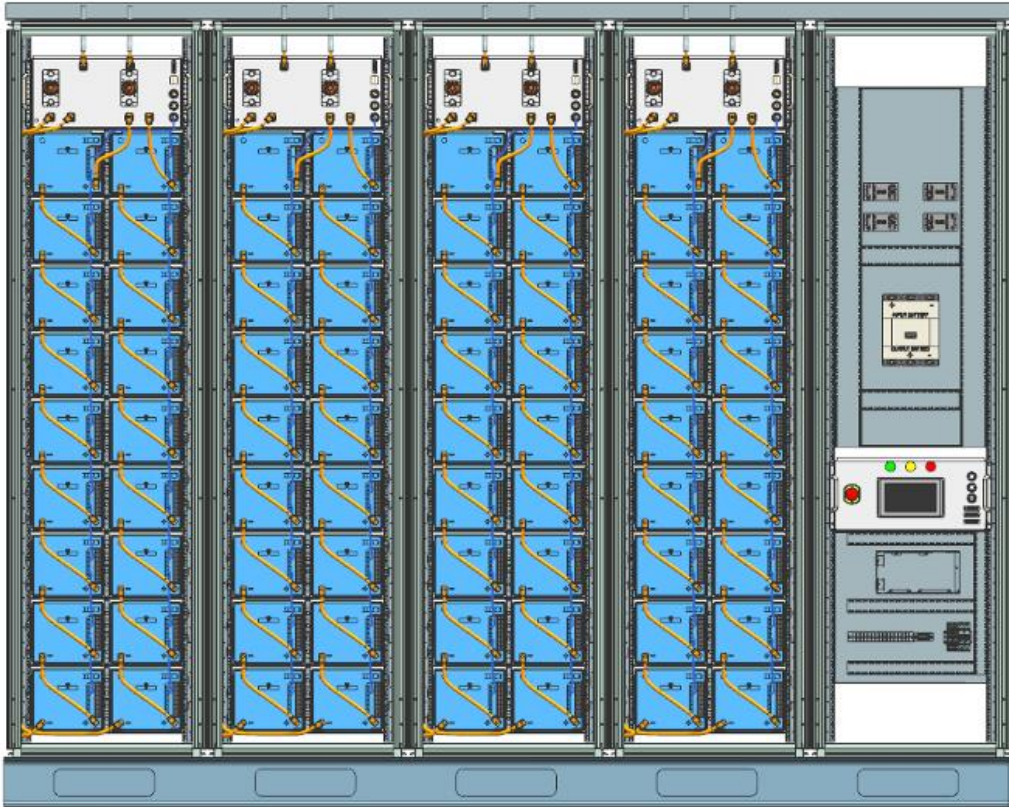

Item	Width(mm)	Depth(m m)	Height(mm)	Weight(kg)
Battery Rack 1	600	600	2200	770
Battery Rack 2	600	600	2200	770
Battery Rack 3	600	600	2200	770
Battery Rack 4	600	600	2200	770
BCP Rack	600	600	2200	90

Figure 1 Pack Outline Drawing